KOMATSU

PC 350

Hydraulic Excavator

PC350LC-8

Long Reach

ENGINE POWER
194 kW / 260 HP @ 1.950 rpm

OPERATING WEIGHT
ca. 42.000 kg

BUCKET CAPACITY
max. 1,1 m^3

Hydraulic Excavator

PC350LC-8 Long Reach

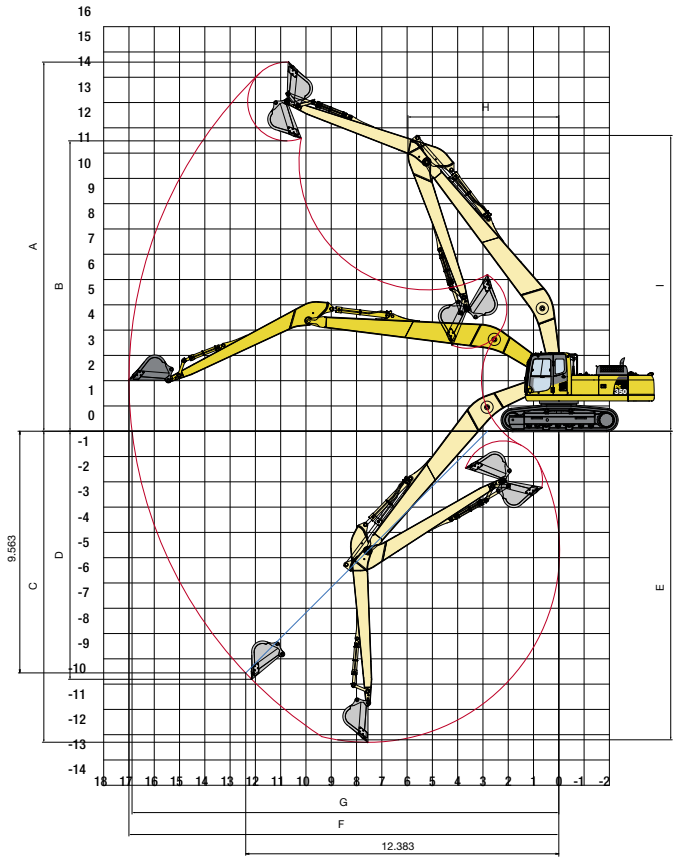

OPERATING WEIGHT (APPR.)

Triple grouser shoes	Operating weight	Ground pressure
700 mm	42.130 kg	0,64 kg/cm²
800 mm	42.510 kg	0,56 kg/cm²
850 mm	42.700 kg	0,54 kg/cm²

Operating weight, including work equipment, 870 kg bucket, operator, lubricant, coolant, full fuel tank and the standard equipment.

BUCKETS

Bucket type	Material density	Max. bucket width	Max. bucket weight
General purpose 0,93 m³	1,8 ton/m³	1.000 mm	780 kg
General purpose 1,11 m³	1,2 ton/m³	1.200 mm	890 kg
Ditch cleaning bucket	1,1 ton/m³	2.100 mm	890 kg*

Values shown are in accordance with EN474-5:2006.

* Maximum load at end of arm (bucket + payload) allowed is 2.645 kg

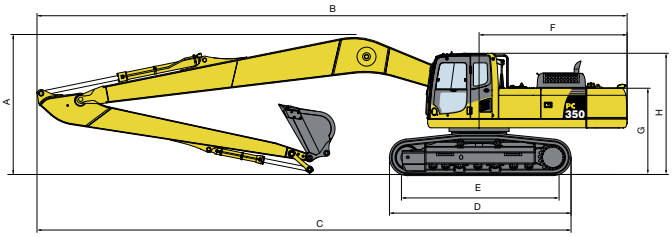

WORKING RANGE

	Arm length	6.025 mm
	Boom length	10.000 mm
A	Max. digging height	14.595 mm
B	Max. dumping height	11.480 mm
C	Max. digging depth	12.300 mm
D	Max. vertical wall digging depth	9.445 mm
E	Max. digging depth for 2.400 mm level	12.200 mm
F	Max. digging reach	17.000 mm
G	Max. reach at ground level	16.880 mm
H	Min. swing radius	5.970 mm
I	Max. height of minimum swing	11.700 mm

TRANSPORT DIMENSIONS

A	Overall transport height	3.570 mm
B	Overall transport length	15.050 mm
C	Transport length	13.640 mm
D	Track length	4.955 mm
E	Track length on ground	4.030 mm
F	Tail swing radius	3.775 mm
G	Machine tail height (to top of counterweight)	2.580 mm
H	Overall cab height	3.130 mm

IN ADDITION TO THE EQUIPMENT FITTED TO THE STANDARD PC350LC-8:

Long Reach boom and arm	●
Automatic greasing system	●
Sealed bucket linkage	●
Prepared for hydraulic quick-coupler	●
HCU for tilting bucket attachment	●

● standard equipment
○ optional equipment

UESS13800P 10/2009

Komatsu Europe International NV · Mechelsesteenweg 586 · B-1800 VILVOORDE (BELGIUM)
Tel: +32-2-255 24 11 · Fax: +32-2-252 19 81 · www.komatsueurope.com

Printed in Europe – This specification sheet may contain attachments and optional equipment that are not available in your area.
Please consult your local Komatsu distributor for those items you may require. Materials and specifications are subject to change without notice.